


HALF ROUND 112MM/68MM RAINWATER SYSTEM

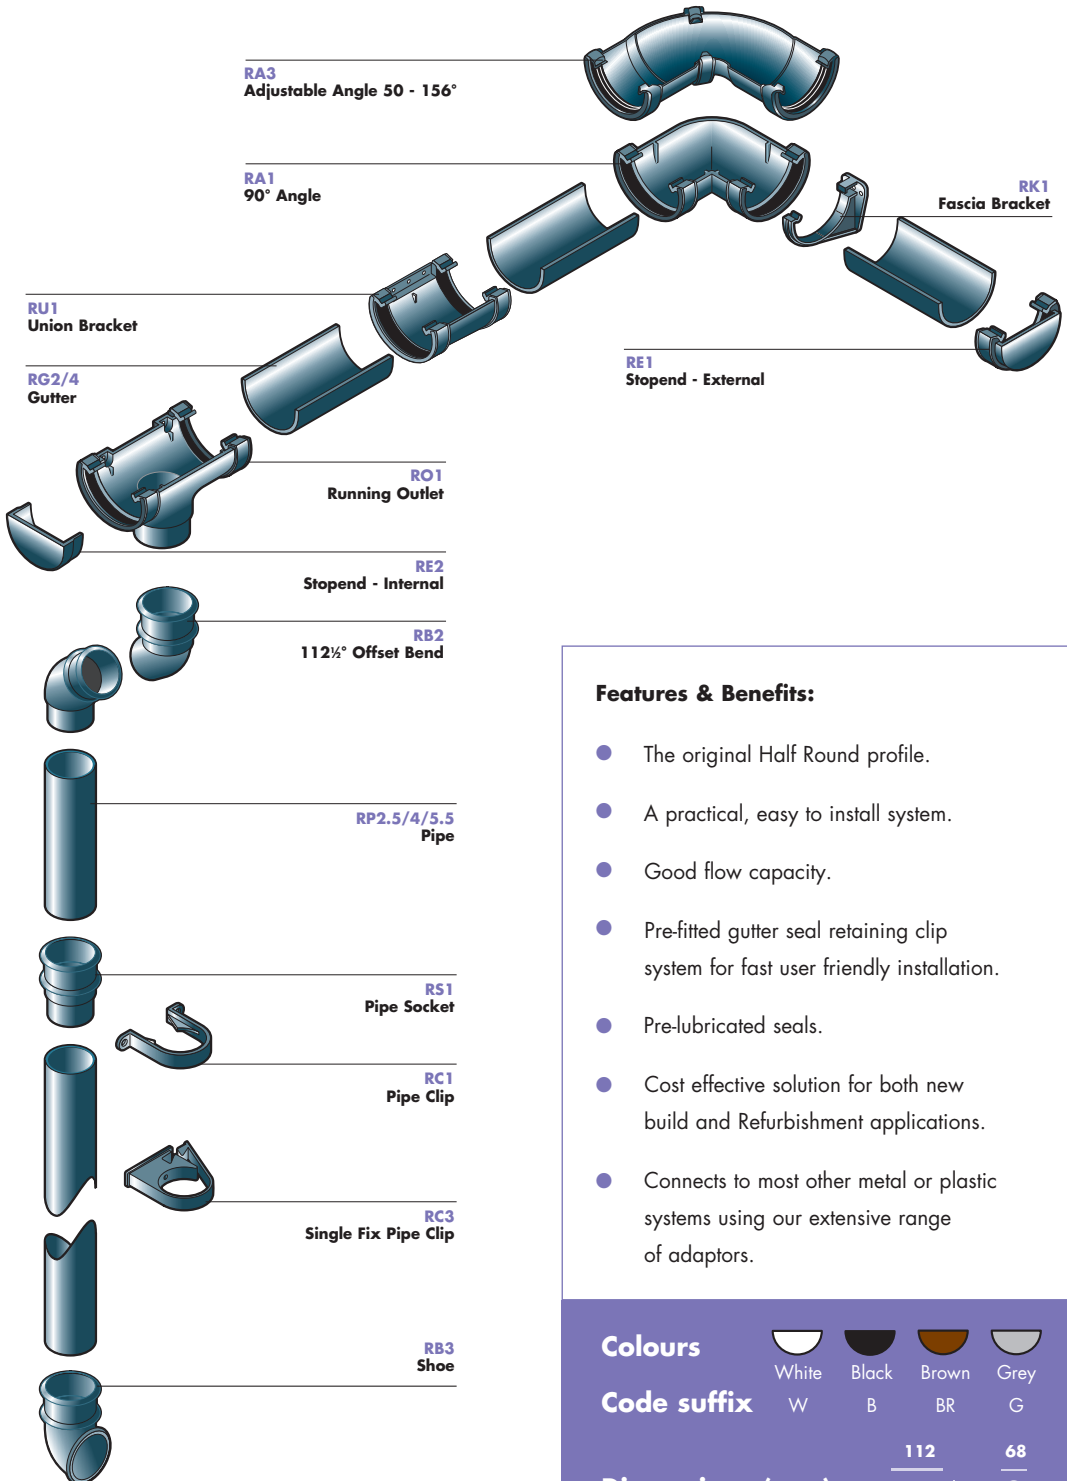

Features & Benefits:

- The original Half Round profile.
- A practical, easy to install system.
- Good flow capacity.
- Pre-fitted gutter seal retaining clip system for fast user friendly installation.
- Pre-lubricated seals.
- Cost effective solution for both new build and Refurbishment applications.
- Connects to most other metal or plastic systems using our extensive range of adaptors.

Colours



Code suffix

White Black Brown Grey
W B BR G

Dimensions (mm)





For optimum performance of Half Round gutter systems we recommend the use of FloPlast 68mm Round downpipe system. Gutter and pipe code reference numbers refer to length of run: 2 metres, 2.5 metres, 4 metres and 5.5 metres.

112mm Gutter & Fittings BS EN 607:2004, BS EN 12200-1:2000, BS EN 1462:2004

Product	Code	Product	Code	Product	Code
 Gutter - 4m 2m	RG4 RG2	 Running Outlet	RO1	Gutter Adaptors:	
 90° Angle	RA1	 Stopend Outlet	RO2	 To Cast Iron Ogee R/H	RD3
 135° Angle	RA2	 Stopend - External	RE1	 To Cast Iron Ogee L/H <small>(not available in Brown)</small>	RD4
 Adjustable Angle 50° - 156° <small>(not available in Grey)</small>	RA3	 Stopend - Internal	RE2	 To Half Round Cast Iron	RD5
 Angle - Any degree FloPlast will fabricate any nonstandard angle to special order.	RA9	 Fascia Bracket	RK1	 Spare Gutter Clip	RRC1
		 Union Bracket	RU1	 Spare Gutter Seal	RRS1

For Ancillaries see page 5.

68mm Round Downpipe & Fittings BS EN 12200-1:2000

Product	Code	Product	Code	Product	Code
 Pipe: 2.5m 4m 5.5m	RP2.5 RP4 RP5.5	 Pipe Clips:	RC1	 Hopper Connects to 65mm Square & 68mm Round downpipe.	RHS1
 Offset Bend 92 1/2°	RB1	 Single Fix <small>(not available in Caramel)</small>	RC3	 67 1/2° Branch	RY1
 Offset Bend 112 1/2°	RB2	 Must be used in conjunction with RB4 & RS2 <small>(Black and White only)</small>	RC4	 Access Pipe <small>(Black/White/Brown only)</small>	RX1
 Shoe	RB3	 Pipe Sockets:	RS1		
 Shoe With Fixing Lugs Must be used in conjunction with RC4 and RS2. <small>(Black/White only)</small>	RB4	 <small>(Black & White only)</small> With fixing lugs. Must be used in conjunction with RC4 and RB4.	RS2		